

Case Sealer

LD-7

Case Sealing for the Real World

This reliable case sealer for industrial environments seals a wide range of cases.

Little David delivers
packaging equipment
that works for you



Self-centering side rails



(Shown with optional pack table.)

The LD-7 offers:

- ☑ Low maintenance
- ☑ UL listed
- ☑ Quick changeover
- ☑ Safe single mast
- ☑ Economical
- ☑ Single hand tightening adjustments
- ☑ Interchangeable tape cartridges

The LD-7 replaces:

- ☑ Expensive labor
- ☑ Hand taping boxes
- ☑ Unsafe machinery

Little David LD-7



LITTLE DAVID




www.loveshaw.com

LD-7

Dimensions:



LD-7:

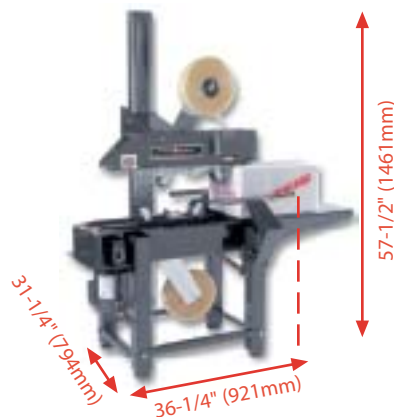

Additional Case Sealer Models:



Also Available LD-XSS:

- Stainless steel case sealer
- Wash down



Also Available Uniform Legend:

- Semi-automatic case sealer
- Seals top and bottom of uniform box sizes



Options of the LD-7:

- Casters
- Available for 3" wide tape
- Leg adjustments to accommodate various conveyor heights
- High mast for box heights to 34" (864mm)
- Front and rear solid or roller pack table
- Top squeezers

Distributor Information:

Features of the LD-7:

Reliable Performance - Warranty:

- 1 Year all components*
- 2 Years Gear Reducer
- 3 Years Cartridge*

*Moving and wear parts are not included. Other restrictions may apply. Consult Loveshaw or your authorized Little David® Distributor for details

Flexible:

- Tapes boxes from 4-1/2" (114mm) to 24" (610mm)
- Compact design allows for portability

Easy Operation:

- Plug in operation
- Minimal operator training required
- Sealed drive system
- CaseLocker ST® tape cartridge requires no lubrication

Safe:

- UL listed
- Single mast design allows clear access
- Knife guard system of the CaseLocker ST® tape cartridge allows the blade to be exposed only when the rollers are depressed

Specifications of the LD-7:

Power Requirements:

- 115 - 220 Volts, 60 cycle, single phase
- Note: Other voltages available. Contact Loveshaw for details.

Operating Speed:

- Continuous belt drive; 80' per minute (24.4 m/min.)
(production rate depends on box size and operator dexterity)

Weight:

- 196.5 lbs (89 kg) uncrated

Closure Material:

- Pressure sensitive tape

Case Capacity: (with 2" wide CaseLocker ST® Cartridge):

Length: 4-1/2" (114mm) - infinite

Width: 4-1/2" (114mm) - 21" (533mm)

Height: 4-1/2" (114 mm) - 24" (610 mm)

Note: Certain length x width x height combinations may not process due to unstable conveying conditions.

LOVESHAW

Route 296, Box 83
South Canaan, PA 18459
Tel: (570) 937-4921 Fax: (570) 937-3229
(800) 572-3434

LOVESHAW Europe

Unit 1 Newton Park,
West Portway Industrial Estate
Andover, Hampshire England SP 10 3 SH
Tel: (1264) 357511 Fax: (1264) 355964



©Lovesshaw, 2014